

Effect of Some Operating Parameters on Quality of Corn Flakes Supported by Some Additives

Marwa, M. Helmy, *Entsar, S. Abdou & Entsar, N. Mohamed

Food Engineering and Packaging Department, Food Technology Research Institute, Agricultural Research Center, Giza, Egypt

Original Article

Article information

Received 12/2/2023

Revised 26/2/2023

Accepted 3/3/2023

Published 7/3/2023

Available online
8/3/2023

Keywords

corn, soybean, oat, die, expansion ratio, water absorption capacity

ABSTRACT

The main objective of this work was to study the effect of some operating parameters on quality of corn flakes supported by some additives. Extruded snacks were prepared using different blends (A, B and C) of grits corn, flakes defatted soy bean and flakes oats [A (50:30:20), B (40:35:25) and C (30:40:30)] respectively, with different moisture contents depend on wet basis (12, 17, 22, 27 and 32 %) and two extruder die diameters (0.6 and 1.0 cm). The chemical compositions of the three blends were determined. It was found that blend C had the higher protein, fibers, fat, moisture content and ash. The results showed that the changing of die diameter and moisture content affected the physical properties of extrudates (expansion ratio, bulk density, hardness, water absorption capacity, water activity, color) for all different blends (A, B and C). Sensory evaluation was subjected (odor, texture, taste, color and overall acceptability), the overall acceptability was 9 for blend (C) with moisture content 22%.

1. Introduction

Extrusion is a process in which many food and feed products can be manufactured (DanYang Ying et al., 2017) is defined as multi-functional, multi-step and mechanical/thermal process during which the food is exposed to a high temperature for a short period of time. Extrusion is extensively utilized for the production, modification and quality improvement of many products in food industry including ready-to-eat snacks, breakfast cereals bakery products, baby foods, pastas (Schmid et al., 2022). It has many advantages such as high productivity, low cost of production and product quality with significant nutrients retention (Dalbhagat et al., 2019; Wang et al., 2019).

The thermo-mechanical cooking takes place in a screw-barrel in which a combination of temperature and pressure leads to produce mechanically shaped extrudate with chemical, physical and structure changes (Rodriguez-Miranda et al., 2011). Alterations in the chemical and physical characteristics of food ingredi-

ents, particularly lipid, protein and starch through the extrusion process have been reported by (Frías et al., 2011)

On other hand extrusion technology have the efficacy to inactivate the population of microorganisms in both low and high moisture foods several studies approved that (Verma et al., 2018; Verma and Subbiah, 2019) it also denatures undesirable enzymes, inactivates some antinutritional factors (haemagglutinins, trypsin inhibitors, phytates and tannins); sterilises the final product; and keeping the natural colours and flavours of extruded foods (Singh et al., 2007). The effect of different extrusion operation factors on the quality and nutritional value of the extruded products has been studied by many researchers (Anton et al. 2009; Kaur et al. 2015; Yağcı and Evci, 2015; Rathod and Annapure, 2016).

The properties of extruded products are greatly of Rice-flour pellets, they are significantly affected by moisture content and at specific temperature.

Sokhey et.al. (1997) studied the effects of die dimensions on extruder performance, they found that the die diameter affected the radial expansion of the extrudate and Specific mechanical energy. In a recent study El-Adly et. al. (2022) found that die hole diameter has noticeable effect on extruder productivity and the specific energy consumption.

Recently numerous studies have fortified extruded snacks with combination of more nutritious food to increase their nutritional value. Corn is an important cereal crop, it is considered as a main ingredient in extrusion processing to manufacture snacks and breakfast cereals due to its nutritional value and special taste (Yang et. al., 2018). Considering the high levels of fiber in corn it can help lower cholesterol and also reduce the risk of colon cancer (Cueto et al. 2010; Hamid and Kalsoom, 2017)

Oat (*Avena sativa*) contains a unique nutritious value because it has good lipid profile with unsaturated fatty acids, high content of protein, contains high amount of vitamins and minerals (Ahmad and Zaffar, 2014) and greater amount of soluble fiber compared to other cereals, it is also a good source of functional ingredients like β -glucan and antioxidants (Singh et. al., 2013). Many studies reveal that oats have beneficial effects on health (Wani et al., 2014). Moreover, β -glucan in oat has great physiological benefits due to its impact on lowering serum cholesterol effects, it is also effective in decreasing the potential dangers of developing chronic diseases (Wolever et al., 2010; Zhou et. al., 2022) and glycaemic control (Sayanjali et al., 2017). Oat contains about 4.5-5.5% of β -glucan (Ajithkumar et al., 2005).

Soybean has considerable potential as human food and already is an integral part of the human daily diet. It contains high levels of protein with good quality and all the macro nutrients desired for balanced nutrition, protein 40 %, dietary fiber 15 % and fat 18 %. Soluble carbohydrate 18 % vitamins and minerals are present as well (Singh et al., 2009). The nine essential amino acids are all found in soy beans and it also have the ability to decrease blood cholesterol, diabetes, obesity and reduce the risk of

certain types of cancer (Kingsley et. al., 2017 and Demmer et. al., 2016).

Oat, soybean and corn were used separately and sometimes two of them with other ingredients to produce extruded foods (Zheng et. al., 2020; Guo et. al., 2018) whereas composite foods with proteins and fiber and other functional components provide a nutritional psycho-social beneficial quality that promotes acceptance of extruded foods. Combining oat, soybean and corn will result in desirable nutritional profiles and improvement in acceptance of snack products.

The aim of this study is to investigate the effect of different operating parameters (moisture, components ratio and die diameter) on the quality attributes of extruded snacks to obtain high nutritional value extrudates from oat, soybean and corn.

2. Materials and Methods

Materials

The raw materials under study (grits corn, flakes oats) were procured from local market, and flakes defatted soy bean was obtained from Food Technology Research Institute. The initial moisture content of grits corn, flakes oats and flakes defatted soy bean were 6.55, 7.0 and 7.5% respectively. The ratios of blends (grits corn: flakes defatted soy bean: flakes oats) were A (50:30:20), B (40:35:25) and C (30:40:30) using different initial moisture content of blends were applied by adding water to achieve different moisture contents (12, 17, 22, 27 and 32 %).

Methods

Single screw extruder

The corn flakes was obtained using a single screw extruder (Insta Pro model 600, USA) was used in this study for snack manufacture. The performance of the extruder depends upon the increase of the pressure imposed by the extruder on raw materials accompanied by the increasing of temperature generated by the friction between extruder's screw surfaces and the blends used.

The extruder barrel length is 45.50 cm and the temperatures in the extruder during the process were found to be 90 °C, 110 °C and 140°C for three

extruder's zones (feeding, kneading and cooking zones) respectively. The die area is the section of the extruder that occurs after the material leaves the screw and it serves as a restriction device at the end of the barrel which can control barrel fill, pressure, and temperature. Two dies were used in this study with 0.6, 1.0 cm diameter and 6.5 cm length.

The moisture content of raw material was adjusted using a required amount of water and mixed with raw material at the initial zone of the extruder and pumped by the screw of the feeding device into the extruder barrel.

Chemical composition of blend components extrudates

Chemical compositions of extrudates (moisture content, ash, fat content, protein content, total carbohydrates and crude fibers) were determined according to standard procedures outlined by Association of Official Analytical Chemists (AOAC, 1990).

Expansion ratio (ER)

Expansion ratio was determined by using vernier caliper as per methods described by Meng et al. (2010). The basic formula used for calculation of lateral expansion is given in the following equation:

$$ER = \frac{\text{Diameter of extrudate} - \text{Diameter of Die}}{\text{Diameter of Die}} \times 100 \quad (1)$$

Bulk density (BD)

Bulk density of the expanded products was estimated using method suggested by (Patil et al., 2007) and calculated using the formula given in the following equation.

$$BD = \frac{4m}{\pi d^2 L} \quad (2)$$

Where; m is mass (g); length L (cm); d is diameter (cm) of extruded snack product

Water Absorption Capacity (WAC)

The method described by Kaur and Singh (2006) was used to determine WAC. The basic formula used for calculation of WAC is given in the following equation:

$$WAC = \frac{\text{Weight of sediment}}{\text{weight of dry solids}} \quad (3)$$

Hardness

Instrumental hardness, maximum peak force of all the extruded puffs was measured in triplicate using C3 Texture analyzer, (Brookfield Ametek, USA).

Water activity

The water activity of extrudates were measured using Rotronic Hygrolab 3 CH-8303, Switzerland.

Color attribute

The chromaticity of extrudate was measured in terms of L* (the degree of lightness), a* (degree of greenness) and b* (degree of yellowness) values, using Chroma meter (Konica Minolta, model CR 410, Japan).

Sensory evaluation

Extrudates samples with different treatments were evaluated for their sensory characteristics (color, texture, taste, odor and overall acceptability) according to Idowu, et al. (2013).

Statistical analysis

A randomized complete block design with three factors were used to analyze all data with three replications for each parameter. The treatment means were compared by least significant difference (L.S.D.) test as given by (Silva and Azevedo, 2009) using Assistat program.

3. Results and Discussion

Chemical composition of blend components and extrudates

Chemical compositions of initial blend components (Corn grits, Flakes defatted, Flakes oats soybean) are shown in table (1). The chemical composition of three different blends A, B and C were determined and were varied according to the initial moisture content of the mixtures and the final moisture content of extrudates.

Table (2) shows an example of chemical analysis of extrudates with initial moisture content 17 % and final moisture content of 7-7.5%. It was found that the maximum value of protein was 31.0% for blend

C, then 24.7% for blend B and 24.6% for blend A, while the values of fat contents were 9.42, 7.22, 6.97% for C, A and B respectively. The moisture contents (MC) were 7.5, 7.2, and 7.0% for blends C, B and A respectively. The maximum value of ash was 4.1% for blend C and 3.1% for blends A and B. The values of total carbohydrates (TC) were

58.08, 58.03, and 47.98% for blends A, B and C respectively. The values of crude fiber (CF) were 3.17, 2.91, and 2.62% for blends C, A, and B respectively. The insoluble dietary fibers (IDF) were 12.3, 8.5, and 7.5% for blends C, B and A respectively, while soluble dietary fibers (SDF) were 9.2, 7.8, and 7.2% for blends C, B and A respectively.

Table 1. Chemical composition of blend components

Blend components	Protein %	Fat %	Fiber %	Total carbohydrates, %	Moisture content %
Corn grits	8.35	5.20	7.0	72.90	6.55
Flakes defatted soybean	47.1	7.0	7.1	31.8	7.0
Flakes oats	12.4	5.2	12.1	62.8	7.5

Table 2. Chemical composition of extrudates.

Blend	IDF %	SDF %	Total dietary fibers %	Protein %	Fat %	MC %	Ash %	TC %	CF %
A	7.5	7.2	14.7	24.6	7.22	7.0	3.1	58.08	2.91
B	8.5	7.8	16.3	24.7	6.97	7.2	3.1	58.03	2.62
C	12.3	9.2	21.5	31.0	9.42	7.5	4.1	47.98	3.17

Physical properties of extrudates

Expansion ratio (ER)

The expansion ratio of extrudates was determined, there is an inverse relation between expansion ratio and bulk density, where increasing ER caused decrease in bulk density. Also, higher values of ER are preferable properties for the extrudates which depend on moisture content, extrusion temperature and die diameter, expansion ratio measures the puffing of extrudates (Seth et al., 2013). Table (3) and Fig. (1) show the values of expansion ratio at different moisture contents (12, 17, 22, 27 and 32%) and die diameter (1.0 and 0.6 cm).

Temperature at extruder die was measured using a thermocouple it was found that at 1 cm die the temperature was 140 °C, decreasing the die diameter from 1 to 0.6 cm leads to increase in pressure inside the extruder and raise die temperature to 160 °C this could be due to internal friction between raw material and die wall.

The higher ER when using die diameter 1 cm and 140 °C was 2.2, 1.75, 2.6 for blends (A, B and C) respectively. Also decreasing die diameter to 0.6 cm and 160 °C leads to increase in ER which was 3.42, 3.95, 3.06 for blends (A, B and C) respectively. This can be a result of the high temperature (160 °C) when using die diameter 0.6 cm which cause increase in ER for extrudate blends (A, B and C). Moisture is the main plasticizer of cereal flours, which enables them to undergo a glass transition during the extrusion process and thus facilitates the deformation of the its expansion. The changing in moisture content led to a fluctuation in expansion ratio for all blends A, B and C, which agree with (Bhattacharyya et al., 2006).

From table (3) and Fig (1), it was observed that the expansion ratio decreased with the increase in moisture content of the feeds. This is due to the fact that low moisture feeds can exhibit more drag and therefore exert more pressure at the die, resulting in

greater expansion at the exit of the die than high moisture feeds (Ding et al., 2005; Oluwole, 2008; Rodríguez-Miranda et al., 2011). According to Ilo et al. (1996), an increase in moisture content during extrusion decreases apparent viscosity and expansion ratio during extrusion of maize grits. However,

at higher screw speed 550 rpm, expansion is expected to reduce due to reduced residence time (Hsieh et al., 1990), reduced degree of gelatinization of starch and hence reduce expansion (Onwulata and Konstance, 2006; Oluwole, 2008).

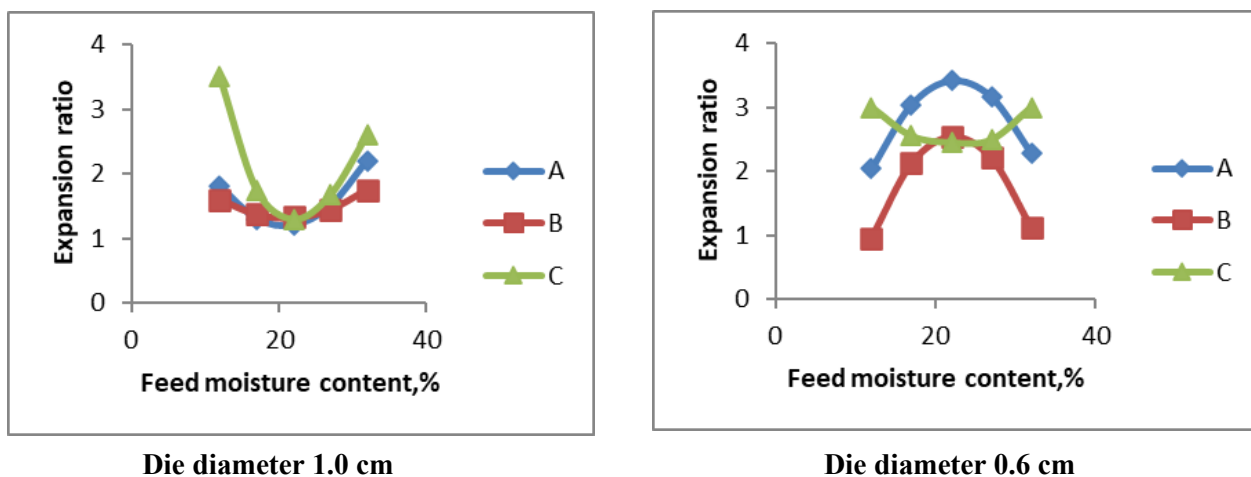


Figure 1. Expansion ratio of extrudates at different feed moisture content for different blends (A, B and C).

Bulk density of extrudates (BD)

Bulk density is the property of extrudates which indicates the expansion and changing in cell structure. The values of bulk density ranged from 0.553 to 0.750 g/cm³ for blend (A) at different moisture contents and die diameter 1.0 cm at 140 °C, while these values decreased at die diameter 0.6 cm and 160 °C where it ranged from 0.500 to 0.590 g/cm³. For blend (B), the bulk density values ranged

from 0.616 to 0.790 g/cm³ using 1.0 cm die diameter at 140 °C, while the bulk density values using die diameter 0.6 cm at 160 °C were ranged from 0.446 to 0.580 g/cm³. The bulk density values of blend C ranged between 0.440 and 0.770 g/cm³ using 1.0 cm die diameter at 140 °C while it ranged from 0.410 to 0.570 g/cm³ using 0.6 cm die diameter at 160 °C as shown in table (3).

Fig (2) shows the bulk density of different blends (A, B and C) using die diameter 1.0 and 0.6 cm. The results indicated that, as moisture content increased, there was a fluctuation of bulk density values, this may be due to limited bubbles formed in blends at high moisture content during extrusion

process thus increasing bulk density. On other side, at low moisture content the melt viscosity and porosity formation of the blends increases, so the values of bulk density were decreased and these agree with (Mridula et al., 2017). Also, (Singh and Muthukumarappan, 2016) reported that the decrease bulk density with increasing moisture content and temperature due to superheating of moisture content which reduce the melt viscosity and increase the formation of bubbles.

Water absorption capacity of extrudates (WAC)

Water absorption capacity becomes important property because the extrudate products are consumed as ready snack food used with many beverages.

Table (3) and Fig. (3) show the WAC values for different blends (A, B and C) and different moisture contents using 1.0 and 0.6 cm die diameter. The WAC for blend A ranged from 163.633 to 274.27 % using 1.0 cm at 140 °C. By changing die diameter to 0.6 cm at 160 °C the WAC values ranged from 118.23 to 273.803 %. WAC values for blend (B) ranged from 141.27 to 292.26 % using die diameter

1.0 cm at 140 °C, while it was ranged from 171.807 to 262.103 % using die diameter 0.6 cm at 160 °C. For blend C WAC ranged from 126.697 to 321.04 % using 1.0 cm die diameter at 140 °C. By changing die diameter to 0.6 cm and 160°C WAC values ranged from 267.533 and 365.007 %. The highest values of WAC were for blend C using 0.6 cm die diameter at 160 °C due to high content of protein 31.0% which allow to keep more of water mole-

cules in the structure formed after extrusion process, also higher content of total dietary fibers 21.5% led to increase binding of water which may explain the increase of WAC for blend C (Nikmaram et al 2015). (Ackar et al 2018 and Philip et al 2017) reported that blend with high protein and fibers content increase the expansion ratio and WAC in the other cereal-based extrudates.

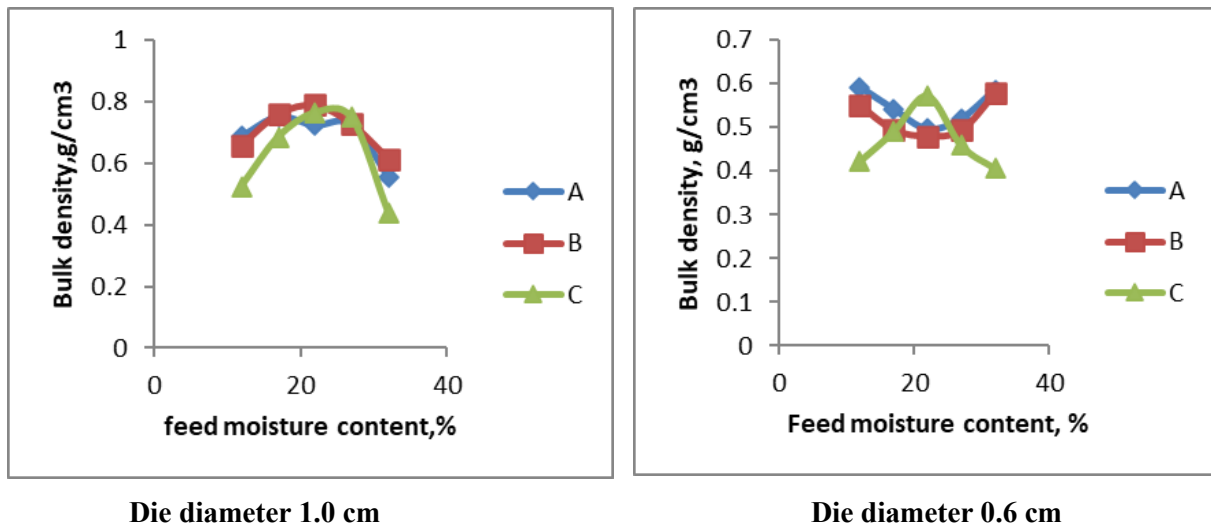


Figure 2. Bulk density of extrudates at different feed moisture content for different blends (A, B and C).

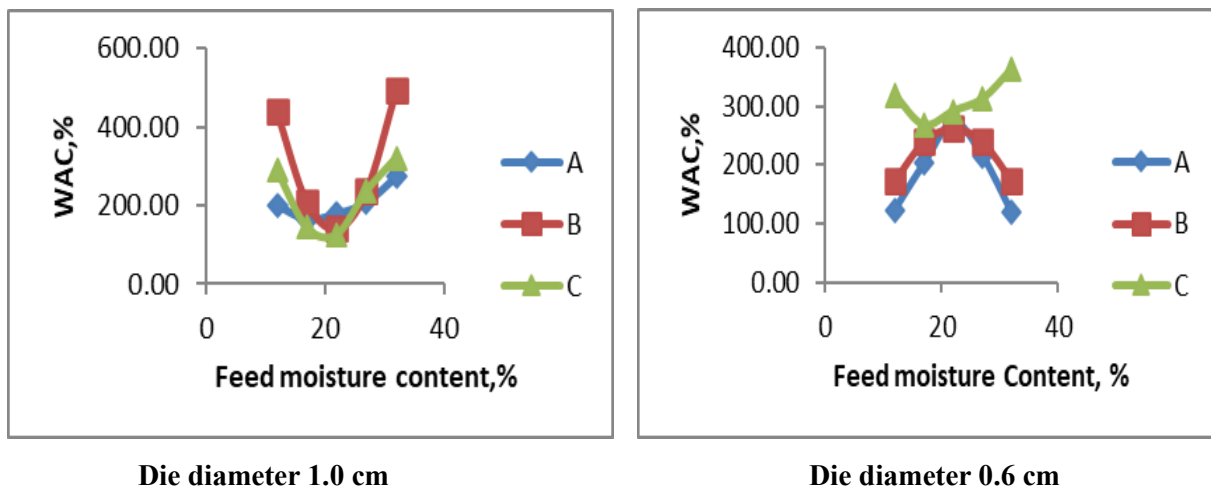


Figure 3. Water absorption capacity of extrudates at different feed moisture content for different blends (A, B and C).

Table 3. Physical properties of extrudates

Die, cm	Blends	Feeding moisture content, %	ER, %	BD, g/cm ³	WAC, %	H, N	AW
1.0	A	12	1.8	0.690	201.167	10.01	0.45
1.0	A	17	1.3	0.750	163.633	11.6	0.473
1.0	A	22	1.2	0.620	178.173	12.216	0.497
1.0	A	27	1.52	0.730	207.58	10.15	0.506
1.0	A	32	2.2	0.553	274.27	9.43	0.556
1.0	B	12	1.6	0.660	239.663	10.09	0.676
1.0	B	17	1.37	0.760	209.297	11.03	0.617
1.0	B	22	1.33	0.790	141.217	11.63	0.55
1.0	B	27	1.45	0.730	235.587	10.23	0.543
1.0	B	32	1.75	0.616	292.26	9.24	0.497
1.0	C	12	3.5	0.526	289.043	6.98	0.58
1.0	C	17	1.76	0.686	144.717	10.09	0.626
1.0	C	22	1.3	0.770	126.657	11.9	0.603
1.0	C	27	1.67	0.716	236.697	10.3	0.677
1.0	C	32	2.6	0.440	321.04	7.21	0.660
0.6	A	12	2.05	0.590	123.067	8.29	0.504
0.6	A	17	3.04	0.540	202.82	6.09	0.504
0.6	A	22	3.42	0.500	273.803	4.88	0.517
0.6	A	27	3.18	0.520	215.523	7.63	0.514
0.6	A	32	2.29	0.586	118.23	9.75	0.527
0.6	B	12	3.95	0.550	171.807	9.85	0.534
0.6	B	17	2.13	0.493	239.463	8.73	0.534
0.6	B	22	2.58	0.446	262.103	5.25	0.543
0.6	B	27	2.21	0.490	239.713	9.12	0.557
0.6	B	32	1.12	0.580	172.303	10.18	0.554
0.6	C	12	3	0.420	320.677	10.31	0.497
0.6	C	17	2.55	0.490	267.533	5.94	0.513
0.6	C	22	2.45	0.570	291.347	6.59	0.517
0.6	C	27	2.52	0.460	312.733	8.73	0.53
0.6	C	32	3.06	0.410	365.007	11.2	0.547
LSD	Die		0.396	0.0064	0.0933	0.108	0.0085
	Blends		0.486	0.0079	0.114	0.132	0.0105
	Moisture		0.627	0.0102	0.145	0.171	0.0135
	Die × Blends		0.687	0.0112	0.1616	0.187	0.0148
	Die × moisture		0.887	0.0144	0.209	0.242	0.0191
	Blends × moisture		1.086	0.0176	0.256	0.296	0.0234
	Die × blends × moisture		1.536	0.05	0.361	0.419	0.0331

ER: Expansion Ratio, BD: Bulk Density, WAC: Water Holding Capacity, H: Hardens, a_w: Water Activity

Hardness of extrudates (H)

The hardness of extrudates is a sensory perception of the humans and is associated with expansion and cell structure of extrudates (Wani and Kumar 2016). It is the average force required for a probe to penetrate the extrudate. The hardness for different blends (A, B and C) at different moisture content

and die diameter were shown in table (3) and Fig. (4). For blend A, the hardness ranged from 9.43 to 12.216 N using 1.0 cm die diameter at 140 °C. By changing die diameter to 0.6 cm at 160 °C the hardness values ranged from 4.850 to 9.750 N. Hardness values for blend (B) ranged from 9.24 to 11.63 N when using die diameter 1.0 cm at 140°C, on

the other hand when using die diameter 0.6 cm at 160°C the hardness ranged from 5.250 to 10.180 N. For blend (C) hardness ranged from 6.980 to 11.9 N using 1.0 cm die diameter at 140 °C. By changing die diameter to 0.6 cm at 160 °C hard-

ness values ranged from 5.94 and 12.2. It was observed that decreasing in die diameter and increasing in temperature caused to decreasing hardness of extrudates due to increasing in expansion ratio (Kumar et al., 2010 and Meng et al., 2010).

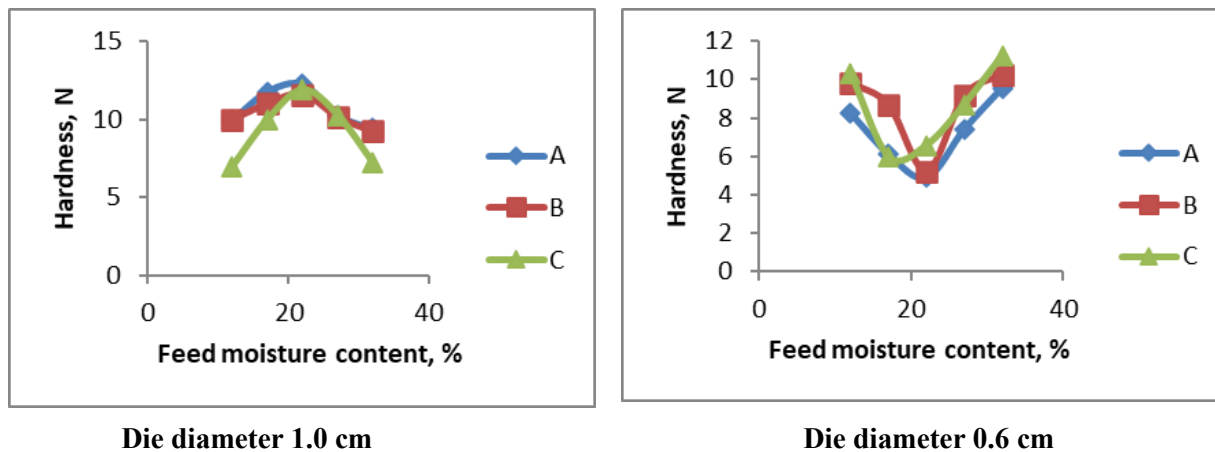


Figure 4. Hardness of extrudates at different feed moisture content for different blends (A, B and C).

Water activity of extrudates (AW)

Water activity of extrudates was determined at different moisture content and die diameters as shown in table (3). For blends A and C, water activity increased as moisture content increased from 5 to 25 % using 1.0 cm die diameter. By changing die diameter to 0.6cm and 160 °C, water activity approximately increased with increasing moisture content for all blends (A, B and C). Higher water activities were found as evaporated water decreased using die diameter 1.0 cm and 140 °C during extrusion, which could be an indicator for susceptibility to microorganism growth. Thus the produced food with high water activity values more than 0.600 were excluded due to risk of spoilage (Belitz et al., 2009).

Color of extrudates

Color is an important property for acceptance the snack food. Color components are represented by L*, a* and b* values. The effect of blends (A, B and C), die diameter (1.0 and 0.6cm) and moisture content (5, 10, 15, 20 and 25%) on color is presented in table (4). The symbol L* is for (black/white), a* is for (green/red) and b* is for (blue/yellow) are recorded for extrudates with different treatments

and the results are given in table (4). For blend A, the values of L* ranged from 45.680 to 72.350, while the values of a* ranged from 8.330 to 10.210 and the values of b* ranged from 13.420 to 20.760 at different moisture content using die diameter 1.0 cm (140 °C). By changing die diameter to 0.6 cm (160°C), the values of L* ranged from 48.540 to 85.230, while the values of a* ranged from 8.740 to 12.00 and the values of b* ranged from 16.740 to 19.230. For blend B, the values of L* ranged from 64.320 to 70.640, while the values of a* ranged from 8.550 to 13.950 and the values of b* ranged from 8.750 to 32.380 at different moisture content using die diameter 1.0 cm (140°C). By changing die diameter to 0.6 cm (160°C), the values of L* ranged from 52.780 to 82.050, while the values of a* ranged from 10.190 to 11.060 and the values of b* ranged from 12.350 to 22.480. For blend C, the values of L* ranged from 54.780 to 71.640, while the values of a* ranged from 9.310 to 11.380 and the values of b* ranged from 16.470 to 20.530 at different moisture content using die diameter 1.0 cm (140°C). By changing die diameter to 0.6 cm (160°C), the values of L* ranged from 62.290 to 69.390, while the values of a* ranged

from 10.290 to 12.200 and the values of b* ranged from 18.280 to 23.780. In general, lightness value of the extrudates were increased, while a* and b* values were decreased by increasing moisture level from 17 to 32% for extrudates obtained by 1.0 and 0.6 cm die diameters.

Table 4. Color components of extrudates for different blends A, B and C.

Die diameter, cm	blends	Feeding moisture content, %	L*	a*	b*
1.0	A	12	45.680	10.210	20.760
1.0	A	17	53.600	9.750	18.560
1.0	A	22	56.460	8.870	18.180
1.0	A	27	66.730	9.020	15.160
1.0	A	32	72.350	8.330	13.420
1.0	B	12	70.640	8.750	8.750
1.0	B	17	67.830	8.550	15.460
1.0	B	22	68.850	13.950	19.070
1.0	B	27	64.730	10.860	19.880
1.0	B	32	64.320	13.480	32.380
1.0	C	12	71.640	10.940	16.470
1.0	C	17	62.880	10.080	18.640
1.0	C	22	68.110	11.380	18.740
1.0	C	27	56.660	9.310	19.370
1.0	C	32	54.780	9.440	20.530
0.6	A	12	48.540	8.740	19.150
0.6	A	17	60.540	9.430	17.870
0.6	A	22	61.130	10.540	19.230
0.6	A	27	78.860	11.050	16.740
0.6	A	32	85.230	12.000	16.740
0.6	B	12	82.050	11.060	12.350
0.6	B	17	70.550	10.860	15.760
0.6	B	22	75.730	10.560	15.570
0.6	B	27	55.890	10.420	20.850
0.6	B	32	52.780	10.190	22.480
0.6	C	12	62.290	10.290	18.280
0.6	C	17	66.320	10.480	20.690
0.6	C	22	67.260	11.180	20.630
0.6	C	27	68.350	11.670	20.250
0.6	C	32	69.390	12.200	23.780
LSD			0.4240	0.0450	0.1090
Die					
Blends			0.5190	0.5560	0.1340
Moisture			0.6710	0.0718	0.0609
Die × Blends			0.7350	0.0787	0.1890
Die × moisture			0.9490	0.1020	0.2440
Blends × moisture			1.1630	0.1240	0.2990
Die × blends × moisture			1.6400	0.1759	0.4230

L* for (black/white)

a* for (green/red)

b* for (blue/yellow)

Sensory evaluation

The extrudates with different treatments were subjected to sensory evaluation for odor, texture, taste, color and overall acceptability as shown in table (5). The results showed that high overall acceptability (8.00) was obtained for blend C with moisture content 12, 17% when using 1.0cm die diameter

and 140°C. By changing die diameter to 0.6 cm, the overall acceptability was (9.00) at 22% moisture content for blend C which agree with other physical properties studied. It can be observed that the overall acceptability decreased significantly with increasing die diameter and decreasing temperature.

Table 5: Sensory evaluation of extrudates

Die diameter, cm	Blends	Feeding moisture content, %	Odor	Texture	Taste	Color	Overall
1.0	A	12	8.000	4.670	6.340	5.670	5.670
1.0	A	17	7.340	6.340	5.670	4.000	6.000
1.0	A	22	7.340	6.670	5.670	3.670	5.000
1.0	A	27	8.000	3.670	6.670	6.000	5.340
1.0	A	32	8.000	5.000	5.340	5.340	4.670
1.0	B	12	7.670	4.670	7.670	6.670	7.000
1.0	B	17	7.670	7.000	6.000	4.000	6.670
1.0	B	22	8.000	7.600	5.600	4.000	4.000
1.0	B	27	7.340	6.000	6.000	5.000	6.340
1.0	B	32	7.670	4.670	5.000	6.000	6.340
1.0	C	12	8.670	5.340	8.670	5.340	8.000
1.0	C	17	7.340	7.340	8.340	5.000	8.000
1.0	C	22	8.330	7.340	8.000	5.000	7.670
1.0	C	27	8.670	7.340	7.340	6.000	7.340
1.0	C	32	8.000	7.340	7.340	7.000	7.000
0.6	A	12	7.670	5.670	7.340	6.000	5.670
0.6	A	17	7.670	7.340	6.670	8.340	7.670
0.6	A	22	7.670	8.000	6.000	9.000	8.340
0.6	A	27	7.670	8.340	5.670	8.340	8.000
0.6	A	32	7.000	6.670	5.000	5.670	4.670
0.6	B	12	7.340	6.630	7.340	7.000	8.000
0.6	B	17	8.000	8.000	8.340	8.000	7.340
0.6	B	22	9.000	8.670	8.340	9.000	6.670
0.6	B	27	7.000	7.340	8.000	8.000	6.670
0.6	B	32	7.670	6.000	6.000	6.670	6.000
0.6	C	12	8.000	6.670	8.340	8.340	8.000
0.6	C	17	8.340	7.670	8.340	8.000	8.000
0.6	C	22	8.340	9.000	8.670	8.670	9.000
0.6	C	27	8.340	7.340	8.000	7.000	7.000
0.6	C	32	8.000	6.670	7.670	7.670	7.670
LSD	Die		0.2980	0.3050	0.3000	0.2650	0.2490
	Blends		0.3650	0.3730	0.3680	0.3240	0.3050
	Moisture		0.4710	0.4820	0.4750	0.4190	0.3940
	Die × Blends		0.5160	0.5280	0.5200	0.4590	0.4320
	Die × moisture		0.6660	0.6810	0.6720	0.5920	0.5570
	Blends × moisture		0.8160	0.8340	0.8220	0.7250	0.6830
	Die × blends × moisture		1.1500	1.1800	1.1600	1.0300	0.9700

4. Conclusion

Corn grits, flakes soybean and flakes oat were used as blends with ratios (50:30:20), (40:35:25) and (30:40:30) using different feed moisture contents (12, 17, 22, 27 and 32 %). These blends were manufactured by single screw extruder using two die diameters (1.0 and 0.6 cm). The chemical components, physical properties and sensory evaluation of extrudates were determined. Moisture content has a significant effect on the extrudates. Decreasing die diameter caused higher values of expansion ratio and WAC and lower values of hardness and bulk density at the same blend.

References

- Ackar Đ., A. Jozinovic, J. Babic, B. Milicevic, J. P. Balentic and D. Subaric. (2018). Resolving the problem of poor expansion in corn extrudates enriched with food industry by-products. *Innovative Food Science & Emerging Technologies*. 47, 517–524.
- Ahmad, M. and Zaffar, G. (2014). Evaluation of oats (*Avena sativa* L.) genotypes for β -glucan, grain yield and physiological traits. *Applied Biology Research*. 16(1),1-3.
- Ajithkumar, A., Andersson, R., & Åman, P. (2005). Content and molecular weight of extractable β -glucan in American and Swedish oat samples. *Journal of Agricultural and Food Chemistry*, 53, 1205–1209.
- Anton, A. A., Fulcher, R. G., & Arntfield, S. D. (2009). Physical and nutritional impact of fortification of corn starch-based extruded snacks with common bean (*Phaseolus vulgaris* L.) flour: Effects of bean addition and extrusion cooking. *Food Chemistry*, 113(4), 989-996.
- AOAC. (1990). *Official Methods of Analysis of the Association of Official Analytical Chemists*, 15th ed. Washington, pp 456-579.
- Belitz H. D., W.Grosch and P. Schieberle. (2009). *Food Chemistry*. Springer-344 Verlag (4th ed.), pp:3-5
- Bhattacharyya P., U. Ghosh, H. Gangopadhyay and U. Raychaudhuri, (2006). Physico-chemical characteristics of extruded snacks prepared from rice (*Oryza sativa* L), corn (*Zea mays* L) and taro (*Colocasia esculenta* L) by twin screw extrusion. *Journal of scientific & industrial research*. 65, 165-168.
- Cagno, R. D., Mazzacane, F., & Rizzello, C. G. (2010). Synthesis of isoflavone aglycones and equol in soy milks fermented by food-related lactic acid bacteria and their effect on human intestinal Caco-2 cells. *Journal of Agricultural Food Chemistry*, 58(19), 10338.
- Cueto, M.; Farroni, A.; Shoenlechner, R.; Schleininger, G.; Buera, P. Carotenoid and color changes in traditionally flaked and extruded products. *Food Chem*. 2017, 229, 640–645.
- Dalbhat, C. G., Mahato, D. K., & Mishra, H. N. (2019). Effect of extrusion processing on physicochemical, functional and nutritional characteristics of rice and rice-based products: A review. *Trends in Food Science & Technology*, 85, 226–240.
- DanYang Ying, Mya Myintzu Hlaing, Julie Lerisson, Keith Pitts, Lijiang Cheng, Luz Sanguansri, Mary Ann Augustin (2017). Physical properties and FTIR analysis of rice-oat flour and maize-oat flour based extruded food products containing olive pomace, *Food Research International*, 100, 665-673
- Demmer, E., Loan, M. D. V., Rivera, N., Rogers, T. S., Gertz, E. R., German, J. B., & Smilowitz, J. T. (2016). Consumption of a high-fat meal containing cheese compared with a vegan alternative lowers postprandial C-reactive protein in overweight and obese individuals with metabolic abnormalities: A randomised controlled cross-over study. *Journal of Nutritional Science*, 5, 863–875.
- Ding Q, Ainsworth P, Tucker G, Marson H (2005). The effect of extrusion conditions on the physicochemical properties and sensory characteristics of rice-based expanded snacks. *J. Food Eng*. 66(3):283-289.
- El-Adly F. Islam, Bahnasawy H. Adel, Ali A Samir. and Khater G. El-Sayed (2022). Effect of some Engineering Parameters on the Performance of a Locally Made Fish Feed Extruder

- Misr J. Ag. Eng., 39 (4): 537 – 554.
- Frías, J., Giacomino, S., Peñas, E., Pellegrino, N., Ferreyra, V., Apro, N., Carrion, O. M., & Vidal-Valverde, C. (2011). Assessment of the nutritional quality of raw and extruded *Pisum sativum* L. var. laguna seeds. *LWT-Food Science and Technology*, 44 (5), 1303–1308.
- Guo Q., J. Michael, S. Rashim, V. Harpreet, S. Khushbu, A. Sajid. (2018). Extruded corn soy blends: physicochemical and molecular characterization. *Journal of Cereal Science*, 79, 486-493
- Hamid, A. I. M., & Kalsoom, S. (2017). Effect of wheat and corn bran and barley and sorghum β -glucan extracts on the plasma cholesterol level of dietary-induced hypercholesterolemic rats. *Pakistan Journal of Zoology*; Lahore, 49(5), 436–445.
- Hsieh F, Peng IC, Huff HE (1990). Effects of salt, sugar and screw speed on processing and product variables of corn meal extruded with a twin screw extruder. *J. Food Sci.* 55:224-227.
- Idowu O.A., O.A. Olaoye, C.M. Sogotemi and B. Ajayi. (2013). Quality assessment of flour and amala produced from three varieties of sweet potato (*ipomeabatatas*). *International Journal of Food Nutritional Sciences*, 2(4): 1-9.
- Ilo S, Tomschik U, Berghofer E, Mundigler N (1996). The effect of extrusion operating conditions on the apparent viscosity and the properties of extrudates in twin-screw extrusion cooking of maize grits. *Lebensmittel-Wissenschaft und-Technol.* 29(7):593-598.
- Kaur M., and N. Singh. (2006). Relationships between selected properties of seeds, flours, and starches from different chickpea cultivars. *International Journal of Food Properties*, 9, 597-608.
- Kaur, S., Sharma, S., Singh, B., & Dar, B. (2015). Effect of extrusion variables (temperature, moisture) on the antinutrient components of cereal brans. *Journal of Food Science and Technology*, 52(3), 1670-1676.
- Kingsley, U., Steven, O., Agu, C., Orji, O., Chkwube, B., & Nwosu, T. (2017). Anti-hyperlipidemic effect of crude methanolic extracts of *Glycine max* (soy bean) on high cholesterol diet-fed albino rats. *J Journal of Medical Allied Sciences*, 7(1), 1–5.
- Kumar N., B.C. Sarkar and H.K. Sharma. (2010). Development and characterization of extruded product of carrotpomace, rice flour and pulse powder. *African Journal of Food Science*, 4 (11),703–717.
- Meng, X., D. Threinen, M. Hansen, and D.Driedger. (2010). Effects of extrusion conditions on system parameters and physical properties of a chickpea flour- based snack. *Food Research International*, 43, 650–658.
- Mridula D., S.Sethi, S. Tushir, , S. Bhadwal, R. K. Gupta, and S. K. Nanda. (2017). Coextrusion of food grains-banana pulp for nutritious snacks: Optimization of process variables. *Journal of Food Science and Technology*, 54 (9), 2704–2716.
- Nikmaram N., F. Garavand, A. Elhamirad, S. Beiraghi-toosi, and G. Goli-movahhed. (2015). Production of high quality expanded corn extrudates containing sesame seed using response surface methodology. *Quality Assurance and Safety of Crops & Foods*, 7(5), 713–720.
- Oluwole OB (2008). Effect of thermo extrusion cooking on physicochemical, textural and sensory qualities of yam (*Dioscorea rotundata*) and bambara groundnut (*Voandzeia subterranean L. Thou*) blends. Unpublished Ph.D thesis, UNAAB, Abeokuta, Nigeria. pp. 117-213.
- Onwulata CI, and Konstance RP (2006). Extruded corn meal and whey protein concentrate: Effect of particle size. *J. Food Proc. Preser.* 30(4):475-487.
- Patil R. T., Berrios J., Tang J., and Swanson B. G.. (2007). Evaluation of methods for expansion properties of legume extrudates. *Applied Engineering in Agriculture*, 23, 777-783.
- Philip C., I. Oey, P. Silcock, S. M. Beck and R. Buckow. (2017). Impact of protein content on physical and micro structural properties of extruded rice starch-pea protein snacks. *Journal of Food Engineering*. 212, 165–173.

- extruded rice starch-pea protein snacks. *Journal of Food Engineering*, 212, 165–173.
- Rathod, R. P., & Annapure, U. S. (2016). Effect of extrusion process on antinutritional factors and protein and starch digestibility of lentil splits. *LWT-Food Science and Technology*, 66, 114–123.
- Rodriguez-Miranda, J., Ruiz-Lopez, I. I., Herman-Lara, E., Martinez-Sanchez, C. E., Delgado-Licon, E., & Vivar-Vera, M. A. (2011). Development of extruded snacks using taro (*colocasia esculenta*) and nixtamalized maize (*zea mays*) flour blends. *LWT Food Science and Technology*, 44(3), 673–680.
- Sayanjali, S., Ying, D., Sanguansri, L., Buckow, R., Augustin, M. A., & Gras, S. L. (2017). The effect of extrusion on the functional properties of oat fibre. *LWT - Food Science and Technology*, 84, 106–113.
- Schmid, V.; Mayer-Miebach, E.; Behnlian, D.; Briviba, K.; Karbstein, H.P.; Emin, M.A. (2022). Enrichment of starch-based extruded cereals with chokeberry (*Aronia melanocarpa*) pomace: Influence of processing conditions on techno-functional and sensory related properties, dietary fibre and polyphenol content as well as in vitro digestibility. *LWT-Food Sci. Technol.*, 154, 112610.
- Seth D., L.S. Badwaik and V. Ganapathy. (2013). Effect of feed composition, moisture content and extrusion temperature on extrudate characteristics of yam-corn- rice based snack food. *Journal of Food Science and Technology*. 52 (3): 1830–1838.
- Silva, F.A.S. and Azevedo, C.A.V. (2009) Principal Components Analysis in the Software ASSISTAT®-Statistical Attendance. In: World Congress on Computers in Agriculture, American Society of Agricultural and Biological Engineers, Reno, 7.
- Singh S. K., and K. Muthukumarappan. (2016). Effect of feed moisture, extrusion temperature and screw speed on properties of soy white flakes based aquafeed: A response surface analysis. *Journal of the Science of Food and Agriculture*, 96(6), 2220–2229
- Singh, A. K., Kadam, D. M., Saxena, M., & Singh, R. P. (2009). Efficacy of defatted soy flour supplement in Gulabjamun. *African Journal of Biochemistry Research*, 3(4), 130-135.
- Singh, R.; De, S.; Belkheir, A. (2013). *Avena sativa* (Oat), A potential nutraceutical and therapeutic agent: An overview. *Crit. Rev. Food Sci.Nutr.*, 53, 126–144.
- Singh, S., Gamlath, S., Wakeling, L., (2007). Nutritional aspects of food extrusion: a review. *Int. J. Food Sci. Technol.* 42, 916-929.
- Sokhey A. S., Ali Y. and Hanna M. A. (1997). Effects of Die Dimensions on Extruder Performance. *Journal of Food Engineering*, 31, 251-261
- Verma T., Subbiah J. (2019). Conical twin-screw extrusion is an effective inactivation process for Salmonella in low-moisture foods at temperatures above 65 °C. *LWT - Food Science and Technology* 114, 108369
- Verma, T., Wei, X., Lau, S. K., Bianchini, A., Eskridge, K. M., Stratton, J., et al. (2018). Response surface methodology for Salmonella inactivation during extrusion processing of oat flour. *Journal of Food Protection*, 81(5), 815–826.
- Wang, R., Li, M., Chen, S., Hui, Y., Tang, A., & Wei, Y. (2019). Effects of flour dynamic viscosity on the quality properties of buckwheat noodles. *Carbohydrate Polymers*, 207, 815–823.
- Wani S.A. and P. Kumar. (2016). Fenugreek enriched extruded product: optimization of ingredients using response surface methodology. *International Food Research Journal*, 23(1), 18–25.
- Wani, S.A., Shah, T.R., Bazaria, B., Naik, G.A., Gull, A., Muzaffar, K. (2014). Oats as a functional food: a review. *Universal Journal of Pharmacy*, 03(01), 14–20.
- Wolever, T.M.S., Tosh, S.M., Gibbs, A.L., Brand-Miller, J., Duncan, A.M., Hart, V. (2010). Physicochemical properties of oat (β -glucan influences its ability to reduce serum LDL

- cholesterol in humans: a randomized clinical trial. *American Journal of Clinical Nutrition*, 92, 723–732.
- Yağcı, S., & Evci, T. (2015). Effect of instant controlled pressure drop process on some physico-chemical and nutritional properties of snacks produced from chickpea and wheat. *International Journal of Food Science and Technology*, 50(8), 1901-1910.
- Yang Jin Han, Thi Thu Tra Tran, Van Viet Man Le. (2018). Corn snack with high fiber content: Effects of different fiber types on the product quality. 96, 1-6
- Zambrano, Y., Contardo I., Moreno M. C. and Bouchon P. (2022). Effect of Extrusion Temperature and Feed Moisture Content on the Microstructural Properties of Rice-Flour Pellets and Their Impact on the Expanded Product
- Zheng Huanyu, Yan GuoSen, Lee Youngsoo, Alcaraz Christina, Marquez Susan, de Meji Elvira Gonzalez. (2020). Effect of the extrusion process on allergen reduction and the texture change of soybean protein isolate-corn and soybean flour-corn mixtures. *Innovative Food Science and Emerging Technologies* 64, 102421
- Zhou, Z.J.; Ye, F.Y.; Lei, L.; Zhou, S.Y.; Zhao, G.H. (2022) Fabricating low glycaemic index foods: Enlightened by the impacts of soluble dietary fibre on starch digestibility. *Trends Food Sci. Technol.*, 122, 110–122.