

DETECTION OF HYDROCARBON, BY USING ADVANCED WELL LOG TOOLS FOR KAFR EL-SHEIKH FORMATION AT SAPPHIRE FIELD, OFFSHORE NILE DELTA, EGYPT

Hassan El-Kady¹, Mohamed Fathy¹ and Samir Nabil Shehab².

1- Faculty of Science, Demietta University,

2- Nuclear Materials Authority, Cairo Egypt.

ABSTRACT

The present work is devoted to study the geologic setting, reservoir characterization and hydrocarbon detection with conventional and advanced well log methods for Kafr El-Sheikh Formation at Sapphire field, Offshore Nile Delta, Egypt. The used wells are Sapphire-Da, Db, Dc, De, Dh and Dq. By using open hole logging tools, advanced logging tool like Modular dynamic tester (MDT), Mud log during drilling and conventional core that analyzed carefully, to detect the clean sandstone and thin bedded sandstone of the study Location.

These basic well log tools (Gamma Ray, Resistivity, Density and Neutron) reflect clean sandstone reservoir with good way, but can't detect thin bedded sandstone reservoir, as a result of their low vertical resolution, this may miss several intervals charged with hydrocarbons during perforation and production from the field. So, we should run advanced tool like the Modular Dynamic Tester (MDT) and analyze conventional core, if found, and the hydrocarbons in Mud log to detect these missed intervals. Also by using the conventional cores and mud logging while drilling.

The results had showed clean sandstone and thin bedded sandstone reservoir through the advanced well log tools, which identify more than 68% deep water reserve didn't use before this should be taken into consideration in the future wells, workover wells, excellent distribution of facies in both the static and dynamic models, to increase the hydrocarbon production and life time of producible wells. The optimum location for forthcoming wells is south west of the field, because it has the best petrophysical parameters. It has high porosity, hydrocarbon saturation, and net to gross, in addition to low shale volume.

INTRODUCTION

General Outlook on the Nile Delta:

The Nile Delta has the classical shape of the Greek letter shape "Delta", which was compared by Herodotus in the fifth century. The recent Nile Delta covers about (50,000 km²) equally, distributed between onshore and offshore areas. (Fig.1).

The Sapphire Field is located at the northwestern margin of the Nile Delta, approximately 90km offshore from Alexandria. The field lies at the West Delta Deep Marine Concession (Fig.2). It lies at the intersection between Lat 32° 01' 43.192" N and long 30° 21' 10.707" E. The Sapphire block comprises approximately 90 km² surface area. Gas was encountered in the Pliocene sandstones (Kafr El-Sheikh Formation) of that field. The reservoir consists of a succession of sandstones, claystones and siltstones in a general upward

fining succession. Six wells in Sapphire Field are chosen for this study. These are (Sapphire-Da, Db, Dc, De, Dh and Dq), as shown in (figure 1).

MATERIALS AND METHODS

The present study is buildup on basic well logs (Gamma-Ray, Density, Neutron and Resistivity), Modular Dynamic Tester (MDT), Mud log and conventional cores. Six wells had been chosen from the Sapphire field (Sapphire-Da, Db, Dc, De, Dh & Dq).

Log Data

The available well log data for the present study are in digitized form the following table shows the available open-hole well logging tools of six wells studied in this work. The Interactive Petrophysics (Techlog) 3.4 Software was used for the all petrophysical calculations

parameters and different lithologies through Cross Plots

A number of cross plots for the various logging tools, like Density, Neutron, Resistivity and Gamma-ray had been done to make accurate detection of the shale types, lithologies and petrophysical parameters. These petrophysical parameters are very important to make accurate petrophysical evaluation like shale volume, total porosity, effective porosity, permeability, water saturation and hydrocarbon saturation.

Conventional Petrophysical Evaluation of Sapphire Field

properties of encountered reservoir rocks based on the results of well log analysis of Gamma-Ray, Density, Neutron and Resistivity which carried out from wells in the area of study through to detect Petrophysical parameters (clay volume, effective porosity and water saturation) by using Techlog software.

Modular Dynamic Tester (MDT)

MDT gives accurate real-time pressure readings and permeability measurements from high-resolution gauges and precise flow line control to ensure the monophasic flow. Also high-purity and -quality reservoir fluid samples laboratory analysis. Added using the

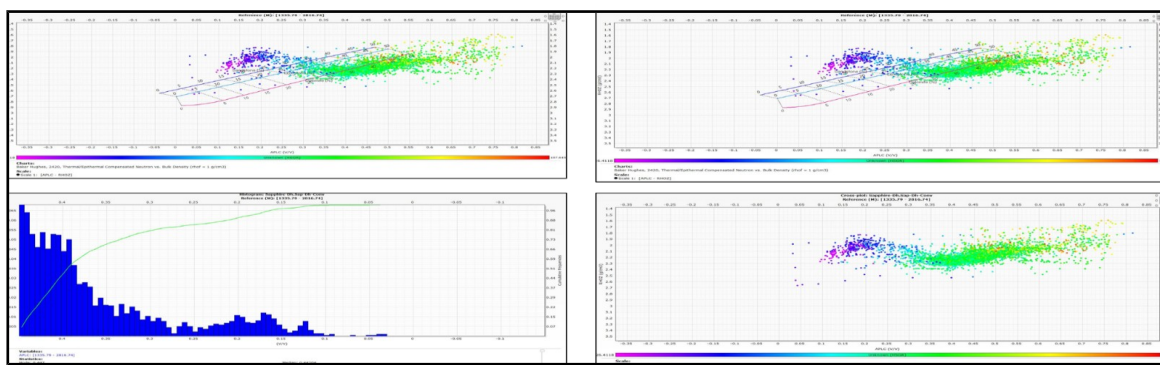


Figure 2. Histograms for Apic and Resistivity. Apic reads between 0.1 and 47 %, neutron reads between 1 and 50 %, and cross plot of potassium and thorium, which give mixed layers and illite of clay minerals. Cross plot of neutron and density which gives gas-bearing sand and shale of Sapphire-Dh Well.

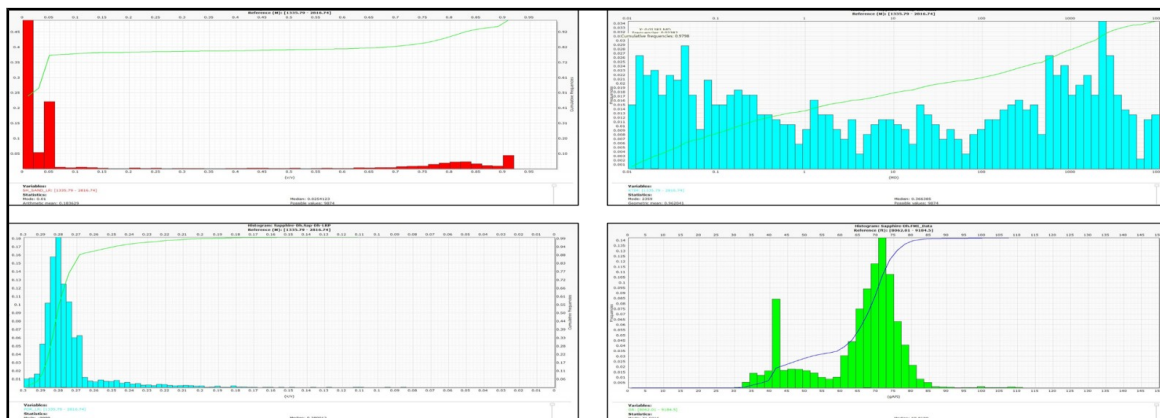


Figure 3. Histograms for porosity, gamma-ray, Hydrocarbon saturation in unconventional intervals and permeability. Porosity reads between 0.12 and 0.28 %, gamma-ray reads between 30 and 110 Api, hydrocarbon saturation reads between 0 and 0.9 % and permeability reads between 0.01 and 5000 md. for Sapphire-Dh well.

In Conventional petrophysical model, we are dealing with lithological and petrophysical

conventional cores to get lithologic description and all the petrophysical parameters. The

advanced tools detect clean and thin bedded sandstone reservoirs, with very high accuracy and show where free fluids, hydrocarbon and permeability are for Production.

sandstone reservoirs basic tools can't catch them as a result of their low vertical resolution, but appears clearly during drilling.

Detection of Hydrocarbon during Drilling by Gas Chromatograph and Gas Detector

Detection of Thin Bedded Sandstone by Conventional Core

Table 3. Shows pressure point which had been taken in both conventional and unconventional reservoirs in Sapphire-Da well.

Well:		Sapphire-Da		RTE (m amsl):		22.25		BURULLUS GAS COMPANY									
Date:		15-Aug-04		Hole Size (in):		8.5		WIRELINE TEST REPORT - PRESSURE DATA									
Suite No:		1		Reservoir:		Sapphire Sd											
File No.	Test No.	DEPTH (m)		Gauge Type	Initial Hydrostatic		PRETEST DATA			SAMPLE DATA			Final		Temp (degF)	Remarks	Test Type
		RKB	TVDSS		psia	ppge	Fmn Press. psia	Mob	Min FP	Final FP	Time (secs)	psia	ppge				
82	1	2776.02	-2732.9	CQG	5665.04	11.94	4476.33	9.6	1131.7				5652.69	11.94	150	Excellent pressure test	N
83	2	2779.99	-2736.7	CQG	5661.28	11.94	4477.5	9.59	1984.1				5659.15	11.93	151	Excellent pressure test	N
84	3	2831.01	-2785.4	CQG	5762.15	11.93	4492.77	9.45	127.55				5757.56	11.92	154	Very Good pressure test	N
85	4	2862.03	-2815	CQG	5823.17	11.93	4603.38	9.59	354.73				5820.33	11.92	156	Very Good pressure test	N
86	5	2865.01	-2817.9	CQG	5826.41	11.92	4607.39	9.58	1096.6				5822.99	11.91	158	Excellent pressure test	N
87	6	2867.02	-2819.8	CQG	5827.26	11.91	4610.05	9.58	761.05				5825.31	11.91	160	Excellent pressure test	N
88	7	2875.52	-2827.9	CQG	5846.21	11.92	4508.52	9.35	1853.7				5843.66	11.91	161	Excellent pressure test	N
89	8	2877.02	-2829.3	CQG	5846.93	11.91	4509.17	9.34	308.86				5844.98	11.91	161.6	Excellent pressure test	N
90	9	2886	-2837.9	CQG	5867.29	11.92	4514.27	9.32	108.98				5864.19	11.91	162.8	Very Good pressure test	N
91	10	2888.02	-2839.8	CQG	5868.37	11.91	4516.83	9.32	208.67				5866.3	11.91	163.8	Very Good pressure test	N
92	11	2886.02	-2837.9	CQG	5871.26	11.92	4511.33	9.32	0.01				5868.33	11.92		WATER IDENTIFICATION	
93	12	2851.03	-2804.5	CQG	5790.77	11.91	4498.06	9.4	149.57				5792.82	11.91	166	Very Good pressure test	N
94	13	2847.45	-2801.1	CQG	5785.16	11.91	4497.18	9.41	26.72				5786.33	11.91	165	Good pressure test	N
95	14	2846.53	-2800.2	CQG	5784.24	11.91	4497.01	9.41	195.68				5784.63	11.91	164.8	Very Good pressure test	N
96	15	2799.52	-2755.3	CQG	5687.23	11.91	5005.05	10.65	367.95				5694.19	11.92		SUPERCHARGED	
97	16	2801.22	-2757	CQG	5697.25	11.92							5696.73	11.92		LOST SEAL	SF
98	17	2865.03	-2817.9	CQG	5826.54	11.92	4609.15	9.59	0.81				5825.06	11.92		DRY TEST	
99	18	2864.9	-2817.7	CQG	5823.58	11.92	5823.88	12.12	22.96				5823.28	11.91		LOST SEAL	SF
100	20	2867.02	-2819.8	CQG	5826.77	11.91							5826.34	11.91		DRY TEST	
101	21	2776	-2732.9	CQG	5640.29	11.91	4478.25	9.61	235.92				5598.98	11.82	162.5	Very Good pressure test	N
102	22	2697.5	-2657.9	CQG	5487.61	11.92	4449.3	9.81	7.51				5488.58	11.93	158.8	Fair pressure test	N
104	23	2508.52	-2475.9	CQG	5124.34	11.97	4274.67	10.12	1204				5123.3	11.97	148.6	Excellent pressure test	N
105	24	2381.99	-2353.9	CQG	4867.91	11.98	4093.13	10.19	87.77				4868.83	11.98	144.4	Very Good pressure test	N

measurements and are through the in bedded which didn't pl, which have tested by the hole cal plugs had been taken, to make a very accurate lithologic interpretation.

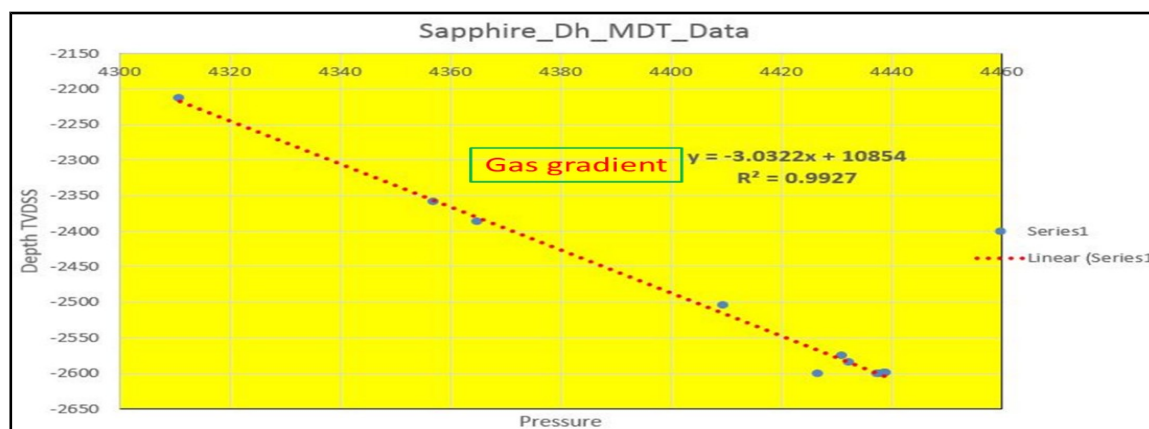


Figure 5. Shows the relation between depth (in meter) and pressure (in psi), which gives the gas gradient in both conventional and unconventional targets of Sapphire-Dh-well.

DETECTION OF HYDROCARBON, BY USING ADVANCED ...

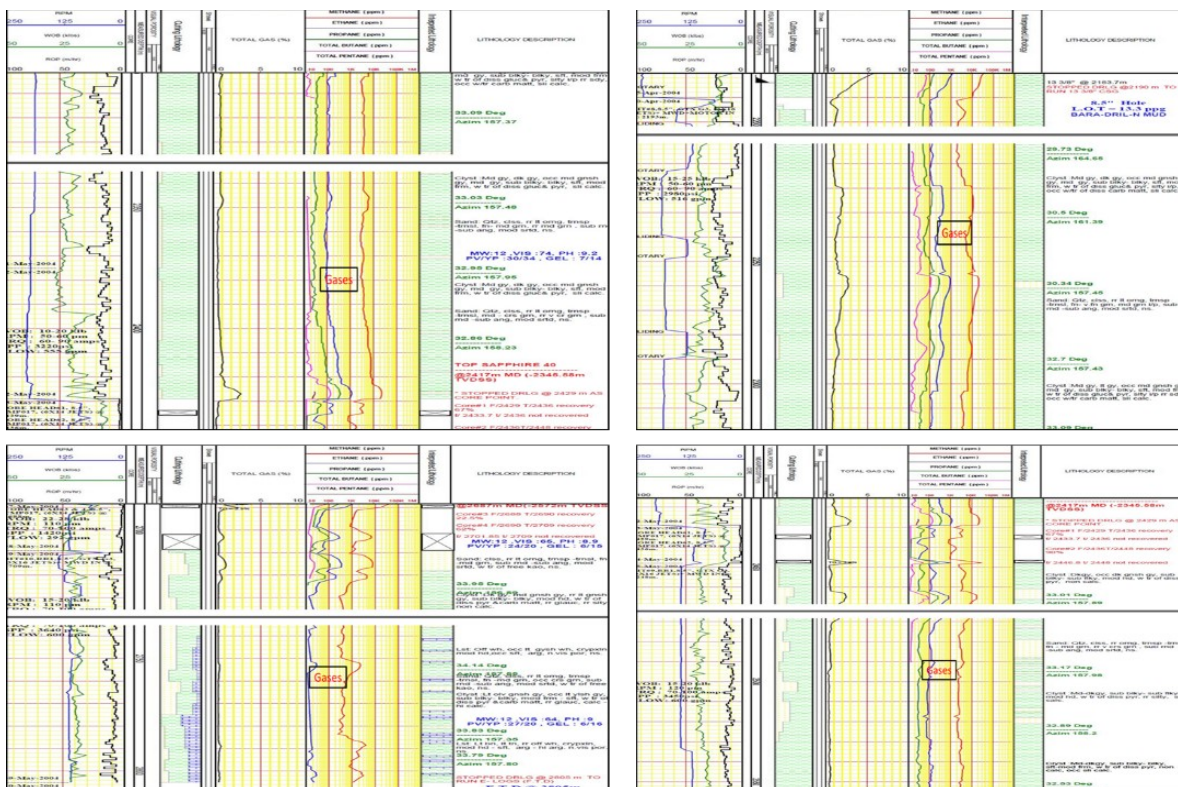


Figure 6. Shows detection of hydrocarbon by gas chromatograph and gas detector during the drilling of Sapphire-Dh well.

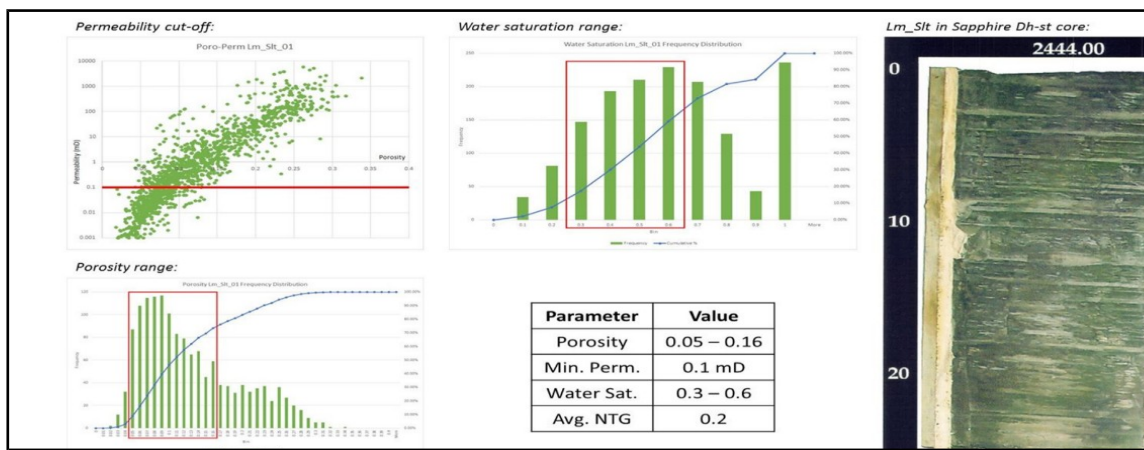


Figure 7. Shows laminated fine sandstone, including the petrophysical parameters (porosity, Permeability, Net to gross ratio and water saturation), porosity ranges from 0.05 to 0.16. Minimum permeability is 0.1 MD, water saturation ranges from 0.3 to 0.6 and net to gross ratio is 0.2 at depth 2444m.

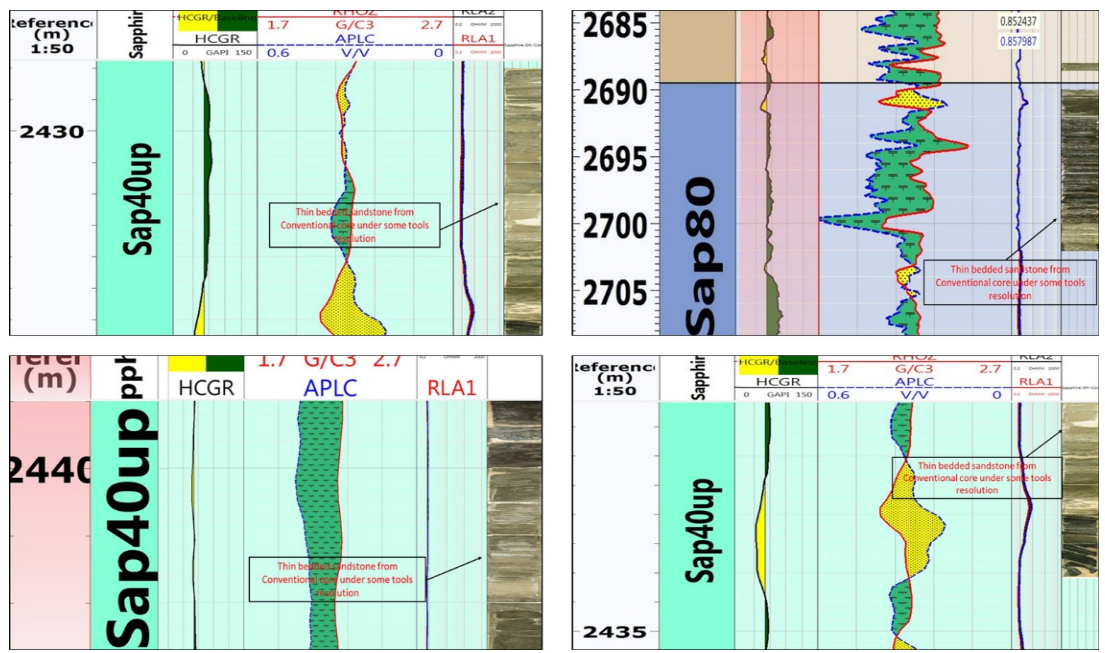


Figure 8. Shows conventional core versus logs at depth (2430m-2704m).

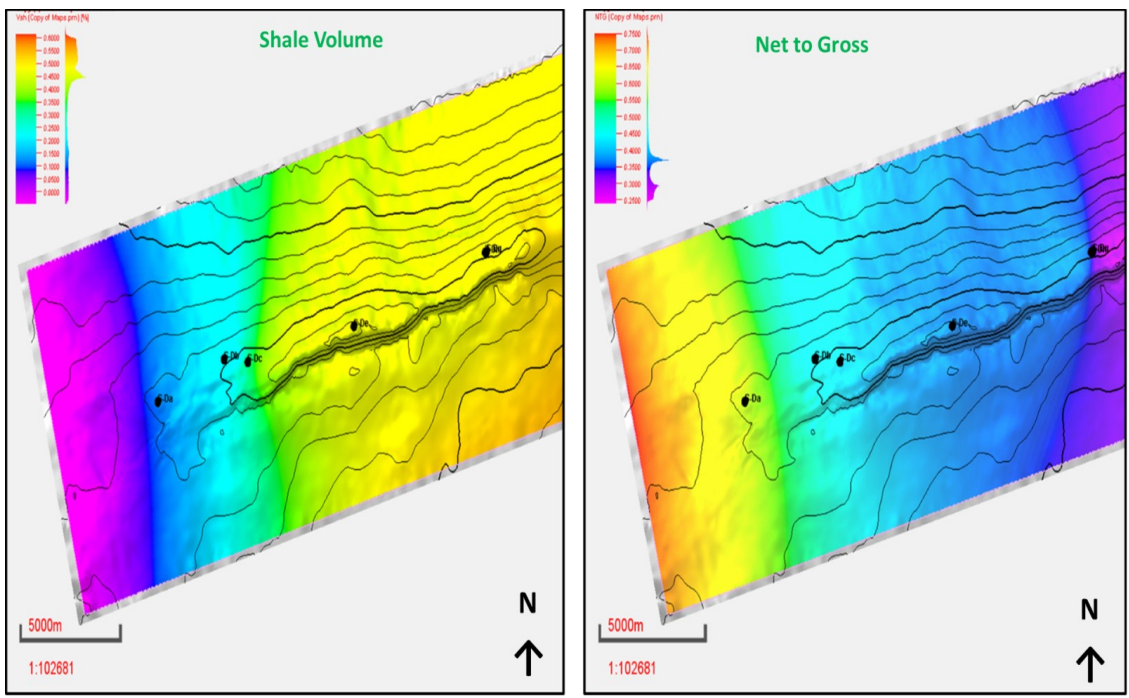


Figure 9. Shows Shale content and net to gross maps.

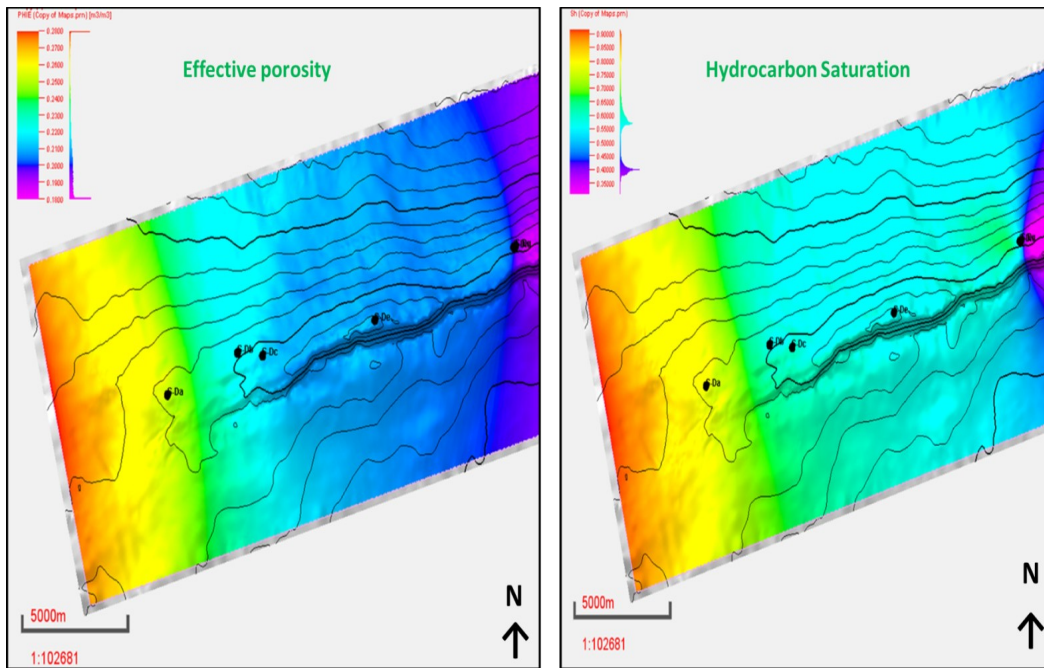


Figure 10. Shows effective porosity and hydrocarbon saturation maps.

Detecting the amount of gas during drilling by gas

CONCLUSIONS

The present work is devoted to the study of geologic setting, reservoir characterization and hydrocarbon detection through the conventional and advanced methods for Kafr El-Sheikh Formation at Sapphire field, Offshore Nile Delta, Egypt. The used wells are Sapphire-Da, Db, Dc, De, Dh and Dq. This is done through using the basic logging tools and advanced logging tool, like the Modular dynamic tester (MDT) and Mud log during drilling also the conventional cores are analyzed carefully to detect the clean sandstone and thin bedded Sandstone of the studied interval.

These basic tools (gamma-ray, resistivity, density and neutron) reflect clean sandstone reservoir with good quality, but can't catch thin bedded sandstone reservoir, as a result of their low vertical resolution, this may miss several intervals charged with hydrocarbon during perforation and production from the field. So, we should run advanced tool like the Modular Dynamic Tester (MDT) and analyze the conventional cores, if found, and hydrocarbon in Mud log, to detect these missed intervals.

chromatograph and gas detector, is a very good indication of both clean and thin bedded sandstone reservoirs. This is because these gases come from the formation, as result of charging with hydrocarbon. In thin bedded sandstone reservoirs, the basic tools can't catch them as a result of their low vertical resolution, but appear clearly during drilling.

By making combination of all the basic logging tools, MDT, Mud logging and conventional cores, we can detect thin bedded sandstone reservoirs clearly and add new reserves to Sapphire field didn't appear before. This is through detection of the amount of sands intercalated with shales and their hydrocarbon saturation, these new sands increase the life time of production and understanding Sapphire field in deep.

The results had showed clean sandstone reservoirs and thin bedded sandstone reservoir through the advanced tools, which identify more than 68% deep water reserve should be taken in consideration in the future wells and workover wells. Excellent distribution of facies in both the static and dynamic models are established to increase the hydrocarbon

production and the life time of producible wells.. The optimum location for forthcoming wells is south west of the field, because it has the best petrophysical parameters. It has high porosity, hydrocarbon saturation, and net to gross, in addition to low shale volume.

REFERENCES

- Lashin, M., and Morgan, E., 2012.** Analysis of well log and pressure data of the gas-bearing sand reservoirs of Kafr El-Sheikh Formation: A case study. EGPC, Cairo, pp. 75-106.
- Marten, R., Shann, M., Mika, J., Rothe, S. and Quist, Y., 2004.** Seismic challenges of developing the pre-Pliocene Akhen Field offshore Nile Delta. The Leading Edge, V. 23, no. 4, pp. 314-320.
- Mayall, M., Jones, E., and Casey, M., 2006.** Turbidite channel reservoirs key elements in facies prediction and effective development. Marine and Petroleum Geology, v. 23, pp. 821-841.
- Othman, A. A. and Fathy, M. 2013.** Seismic attribute techniques applied to delineate channel complex in Pliocene age, north Abu Qir Nile Delta, Egypt. Journal of Applied Sciences Research, V. 9, no. 7, pp. 4255-4270.
- Raslan, S., 2002.** Sedimentology and sequence stratigraphic studies for scarab saffron Field. Ph.D. Thesis, Faculty of Science, Ain Shams University, Cairo, Egypt, pp. 10-43.
- Robert, M., and Mark, S., 2004.** Seismic challenges of developing the pre-Pliocene Akhen Field offshore Nile Delta. The Leading Edge, April 2004.
- Said, K., Farouk, J., Metwalli, I., and Al Arabi, H. S., 2012.** Analysis of petroleum system for exploration and risk reduction in AbuMadi/Elqar'a Gas Field, Nile Delta, Egypt. EGPC, Cairo, p.1-10
- Samuel, A., Kneller, B., Raslan, S., Sharp, A. and Parsons, C., 2003.** Prolithic deep-marine slope channels of the Nile Delta, Egypt. AAPG Bulletin, v. 87, pp. 541-560.
- Sehim, A., 2002.** Structural architecture and tectonic synthesis of Rosetta Province, West Nile Delta Mediterranean. Egypt, p.18-35.
- Sharaf, L.M., 2003.** Source rock evaluation and geochemistry of condensates and natural gases,

offshore Nile Delta Egypt. Journal of Petroleum Geology, vol.26, no.2, pp.189-209.

تحديد الهيدروكربون بالطرق التقليدية والمتطورة لمتكون كفر الشيخ في حقل سفير البحري دلتا النيل مصر

الخلاصة:

يكرس هذا العمل لدراسة البيئة الجيولوجية وتوصيف الخزان والكشف عن المواد الهيدروكربونية بالطرق التقليدية والمتقدمة لمتكون كفر الشيخ في حقل الياقوت في دلتا النيل البحرية بمصر

الآبار المستخدمة في تلك الدراسة هي (سفير-دي أي و سفير دي بي و سفير دي سي و سفير دي آيه و سفير دي أتش و سفير دي كيو) باستخدام البيانات السيزمية، وتسجيلات الآبار الأساسية والمتقدمة و العينات الصخرية الناتجة من حفر الآبار و التتابع الصخري خلال الحفر

وتم الكشف عن الخزانات التقليدية باستخدام الأدوات الأساسية مثل (أشعة جاما، المقاومة، الكثافة والنيوترون) أشعة جاما هي الإشعاع الصادر من العناصر الموجودة في قشرة الأرض التي تخضع للتحلل الإشعاعي حيث تبعث جسيمات ألفا وجزيئات بيتا وجسيمات أشعة جاما نتيجة تفكك انوية الذرات. من الجسيمات الثلاث المتولدة خلال الاضمحلال الإشعاعي الطبيعي، أشعة جاما هي الوحيدة التي يمكن أن تخترق الصخور لمسافة ملحوظة

أداة الكثافة توفر قياسات كثافة التكوين، وتشكيل عامل الكهروضوئية وقطر البئر وتستخدم بيانات الكثافة لحساب المسامية وتحديد الصخور. يتم استخدام مزيج من بيانات سجل النيوترونات والكثافة والتعويض للإشارة إلى وجود الهيدروكربون

المقاومة هي أداة مهمة جدا للدلالة على محتوى الصخور من السوائل عن طريق إرسال التيار الكهربائي إلى الطبقة من قبل أجهزة الإرسال وقياس مقاومة الطبقات على أجهزة الاستقبال. انخفاض المقاومة هو مؤشر على وجود المياه أو الصخر الزيتي، ومقاومة عالية هو مؤشر على وجود الهيدروكربون في الرمال. مزيج من المقاومة وأشعة جاما تعطي مؤشرا جيدا جدا على الغاز الموجود في طبقات الرمال هذه الأدوات الأساسية (أشعة جاما، المقاومة، الكثافة والنيوترون) تحدد الخزان التقليدي بطريقة جيدة، ولكنها لا تستطيع أن تحدد الخزان غير التقليدي نتيجة دقتها المنخفضة، ولتحديد هذا الخزان الغير تقليدي لابد من استخدام أدوات متقدمة ذات دقة عالية

DETECTION OF HYDROCARBON, BY USING ADVANCED ...

مثل والمتقدمة مثل اداة قياس الضغط وادوات
قياس الهيدروكربون خلال الحفر والعينات
الصخرية التقليدية
وأظهرت النتائج خزانات من الحجر الرملي
الرقيق المتداخل مع الصخر الطيني بأدوات
متقدمة مثل ادوات قياس الضغط والغازات
الناجمة من الفتات الصخري خلال عمليات الحفر
والاستدلال علي وجود حجر رملي دقيق متداخل
مع الحجر الطيني من خلال تحليل العينات
الصخرية في المعمل تحليلا دقيقا وسوف نأخذها
في الاعتبار هذه الطبقات ليتم الانتاج منها في
الآبار المستقبلية وتوزيع هذه السحنات في
النموذج الساكن والنموذج الديناميكي لمضاهات
الواقع التحت سطحي وعدم فقد طبقات محملة
بالهيدروكربون وإطالة حياة الآبار
المنتجة وأفضل الاماكن للحفر في هذا الحقل
الجنوب الغربي من حيث احتوائه علي افضل
المعملات البتروفزيائيه